

Outdoor Dining Application

Restaurant Details







I

Food Service Establishment Permit(FSEP)

FSEP#: **50138451** Expiration Date: **06/30/2024**

DOHMH Status: CURRENT

Business Legal Name: 1379 WATER & WHEAT LLC

Assumed Name: WATER & WHEAT

Business Address: 1379 3RD AVE, NEW YORK, NY 10075

Restaurant Information

Entity Type: Limited Liability Corporation (LLC)

Employer Identification Number: 92-2668953

Phone: (646) 484-5054

Email Address: waterandwheatnyc@gmail.com

Emergency Contact Information

First Name: Konstantinos

Last Name: Moschos

Phone: (347) 398-1268

Email Address: mosc.kostas@gmail.com

DOS Information

DOS ID#: 6753580

Process Name: The Limited Liability Company

DOS Address: 2523 14th Place #1, Long Island City, New York 11102

NYS Liquor Authority Information

NYSLA Serial No: NA024023149636

License Type: On-Premises

Name of License: 1379 Water and Wheat LLC

Title of Representative: Owner

Name of Certificate Holder: Konstantinos Moschos

User Information

FSEP#

✓ <u>5013845</u>

5011247

Restaurant Details

Food Service Establishment Permit(FSEP)

FSEP#: **50138451** Expiration Date: **06/30/2024**

DOHMH Status: **CURRENT**

Business Legal Name: 1379 WATER & WHEAT LLC

Assumed Name: WATER & WHEAT

Business Address: 1379 3RD AVE, NEW YORK, NY 10075

Restaurant Information

Entity Type: Limited Liability Corporation (LLC)

Employer Identification Number: 92-2668953

Phone: (646) 484-5054

Email Address: waterandwheatnyc@gmail.com

Emergency Contact Information

First Name: Konstantinos

Last Name: Moschos

Phone: (347) 398-1268

Email Address: mosc.kostas@gmail.com

DOS Information

DOS ID#: 6753580

Process Name: The Limited Liability Company

DOS Address: 2523 14th Place #1, Long Island City, New York 11102

AE NYS Liquor Authority Information

NYSLA Serial No: NA024023149636

License Type: On-Premises

Name of License: 1379 Water and Wheat LLC

Title of Representative: Owner

Name of Certificate Holder: Konstantinos Moschos


User Information

FSEP #

5013845

5011247



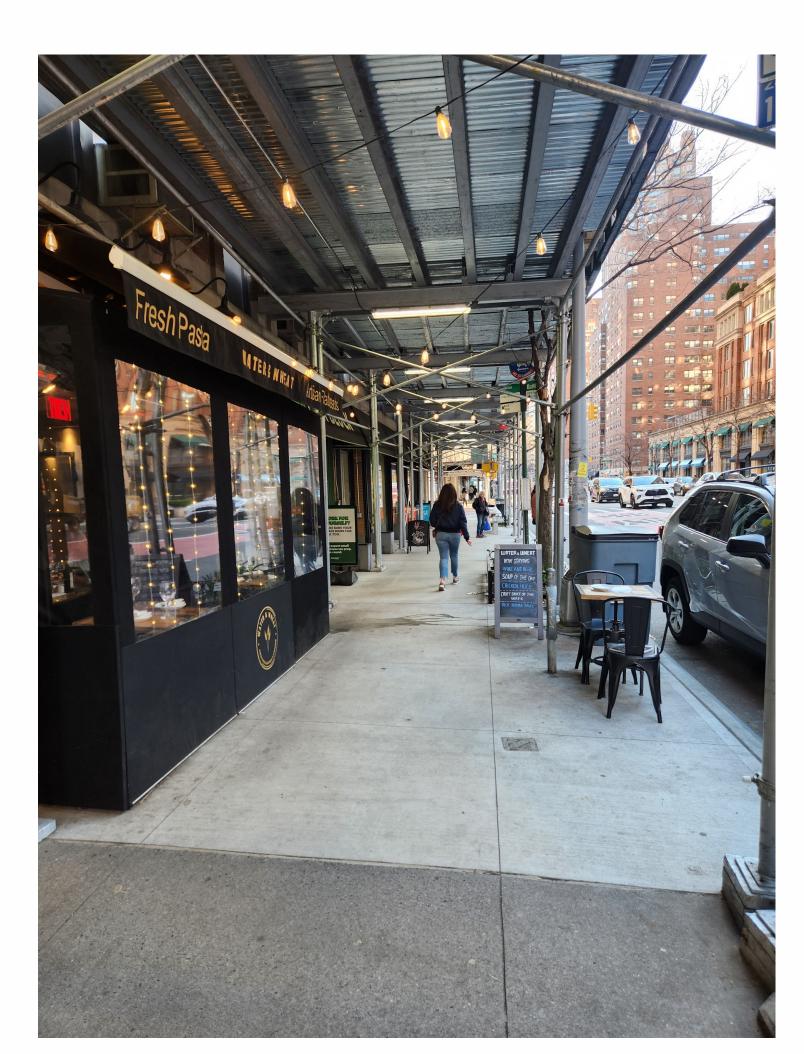



SECTION 1: Site Plan

- This Site Plan form is required to be uploaded in the "Roadway Site Plan" field of your online application.
- Refer to the How to Apply page in the Dining Out NYC website for more information about the application process.

Identify Permitted Parking Location:

- Identify the Parking Sign in front of or around the area where your roadway setup would be located.
- Roadway cafes can only be placed in:
 - 1. Parking spaces, which include: metered and non-metered spaces, commercial parking, alternate side parking, angled parking, and seasonally restricted parking.
 - 2. Loading areas, including loading only, truck loading, hotel loading, and no parking zones.
 - 3. Floating Parking Lane- a parking lane that is separated from the curb by a protected bicycle lane that is adjacent to the curb.

P1 - Parking Space

P2- Loading Area

P3- Floating Parking Lane

Roadway Cafe Site Plan Form

NEW YORK CITY Eric Adams

Applicant Name: 1379 Wetwee Way Restaurant Name: (Ubtendy) (1) hout

FSEP Number:

Drawing Requirements

Food service establishment frontage

shown by: · Line representing space occupied in

- building
- Labels
- · Length

Street names:

· Labels on each street

Sidewalk shown as:

- · Line representing street curb
- · Width measured from building line to curb line

Roadway shown as:

· Lines indicating parking lane

· Width of parking lane

Cafe perimeter shown as:

· Lines indicating perimeter · Length and width of all three sides

Set-up furniture (tables, chairs, etc.) shown as:

· Lines or symbols at approximate location within setup


- Elements or objects shown as: · Lines or symbols
- · Labels
- · Distance from cafe perimeter

Utility coverings shown as:

Symbols representing the

approximate shape of the covering within the setup

> MANHOLE COVER W UTILITY COVERING

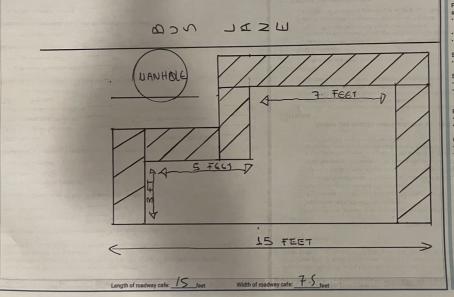

Use the space below to draw or upload your Site Plan representing your cafe perimeters, furniture, and clearances

SECTION 2: Required Clearances

- · Please provide distances from the following objects.
- Only provide a distance if the listed object is within 15 feet of your proposed setup.
- . Leave hox blank if not applicable

(maintain 20 feet from

street)

curb line of Intersecting

Refer to the <u>Setup Guides</u> in the Dir	ning Out NYC	website for more information regardin	g clearances.
Elements with minimum 15 feet clear	ance from roa	adway cafe:	
R01- Subway Stair: Open End	feet		
R02- Fire Hydrant	feet		
Elements with minimum 10 feet clear	rance from roa	adway cafe:	
R03- Subway Elevator Entrance	feet		
R04- FDNY Curb Cut	feet		
R05- MTA Curb Cut	feet		
Elements with minimum 5 feet clears	ance from roa	dway cafe:	
R06- Curb Cut	feet	R11- CitiBike/Bike Share Station	feet
R07- Emergency Exit Hatch	feet	R12- Bike Corral	feet
R08- Subway Stair: Closed End	feet	R13- Micromobility Station	feet
R09- Subway Elevator: Non-Entry	feet	R14- Drainage Infrastructure	feet
R10- Bus Stop Pole: Non- Approaching Side	4 feet		
Elements with minimum 3 feet clear	ance from roa	dway cafe:	
R15- Elevated Train Infrastructure	feet		
R16- Transformer Vault	feet		
Elements with minimum 1 foor and	6 inches clear	ance from roadway cafe:	
R17- Vent Infrastructure	feet		
Elements with minimum 6 inches c	learance from	roadway cafe:	
R18- Thermoplastic Marking	feet		
Roadway cafe distance from cross	walks:		
R19- Adjacent to non-approaching side of crosswalk (min. 8 foot distance)	feet	crosswalk on from e	nce required crosswalk on paching side
R20- Adjacent to approaching (stopping) side of crosswalk (min. 20 foot distance)	feet		
R21- No crosswalk present		0.00	20.0

SECTION 3: Material Requirements

- Please indicate which of the following materials will be part of your roadway cafe by checking the box next to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements.
- Refer to the Setup Guides in the Dining Out NYC website for more information regarding materials.

Materials Checklist: *Required* Barriers Maintained on all sides of the cafe except the side fronting the ground floor restaurant. Not permanently affixed to the roadway. 30-42 inches tall (excluding planting), and at least 4 inches in width. Barriers are interconnected with each other. Any cladding over the barriers is securely fastened or affixed. Minimum 4 inches wide reflective strip on each barrier on the outward facing side. Water-filled with a minimum of 150 pounds per linear foot of barrier length. If your proposed barriers will utilize fill materials other than water please check this box. This may require additional information from the applicant and further review by the Dining Out NYC team, as well as supporting DOT units and City agencies. *Optional- Only check the material categories you intend to use in your roadway cafe* Flooring Durable, lightweight, easily removable, mold-resistant, elevated from the ground level to allow for drainage, and removable to allow for cleaning. Flush with the curb line (except if located on a slope, be flush to the greatest extent feasible), and compliant with applicable accessibility requirements. Maintains a 6 inch covered channel between curb and base of flooring to allow for drainage. Furnishings Lightweight and easily movable. Vertical Screenings Located between the barrier and 6 feet above the cafe base or floor. Located on the roadway facing side, does not extend the beyond the perimeter of the roadway cafe, and is not affixed to the outward facing side of barriers. Easily removable, comprised of non-opaque, fire-grade, and wind resistant materials. If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height. Overhead Coverings/ Umbrellas Minimum of 7 feet and maximum of 10 feet from the base or floor of the roadway cafe. Has a weighted base and any support structures are not affixed to the outward facing side of barriers, are of sufficient size and strength, made of durable materials, and free of defects. Easily removable, comprised of fire-grade and wind resistant materials. If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height. V Lighting and Electrical Connections Any lighting is outdoor rated, properly secured, and lightweight At least 14 feet above sidewalk, and 18 feet above roadway. Not attached to any City property, including street trees. Electrical work complies with the applicable requirements set forth in the DOT's rules and the New York City Electrical Code.

Please check this box if you are submitting additional documents for review. Documents may include technical drawings prepared by a licensed professional.