



20240718010032

Please review this application and provide the required feedback.

DINING OUT NYC

Business Name:

Tamam

Cafe Setup Address: 1108 LEXINGTON AVE, NEW YORK, NY 10075

COMMUNITY BOARD RECOMMENDATION FORM

This form is to be used by community boards during the cafe setup review process. Any comments from the community board should be recorded on this form and submitted to NYC DOT. For information pertaining to specific cafe setup design requirements, visit the Dining Out NYC website for program legislation, rules, and Setup Guides.

Application Number: 20240718010032
Recommendation Response Deadline: 12/24/2024
NYCDOT Internal Use Only
Roadway Cafe Setup Comments:
Comments related to the cafe setup's physical footprint and dimensions :
Comments related to pedestrian flow (i.e., visbility, safety , potential crowding):
Comments related to potential conflicts with existing curb use (i.e., planters, bike racks, bus stops):
Overall recommendation for the cafe setup:
Suggested modifications:



Outdoor Dining Application

Restaurant Details







Food Service Establishment Permit(FSEP)

FSEP#: **50102810** Expiration Date: **01/31/2025**

DOHMH Status: **CURRENT**

Business Legal Name: VEG ON LEX LLC

Assumed Name: TAMAM

Business Address: 1108 LEXINGTON AVE, NEW YORK, NY 10075

Venue Type: Restaurant (no bar)

Last updated from DOHMH: 11/25/2024

Restaurant Information

Entity Type: Limited Liability Corporation (LLC)

Employer Identification Number:

Phone: (212) 513-1988

Email Address: hello@pb.law

FSEP #

5010281



DOS Information

DOS ID#: **5504404**

Process Name: C/O CHEF DRIVEN

DOS Address: 630 NINTH AVENUE, SUITE 803, New York, New York 10036

NYS Liquor Authority Information

Establishment serves alcohol: No.

User Information

Created By: Max Bookman

Created On: 7/17/2024 2:49:41 PM

SECTION 1: Site Plan

- This Site Plan form is required to be uploaded in the "Roadway Site Plan" field of your online application.
- Refer to the How to Apply page in the Dining Out NYC website for more information about the application process.

Identify Permitted Parking Location:

- Identify the Parking Sign in front of or around the area where your roadway setup would be located.
- Roadway cafes can only be placed in:
 - Parking spaces, which include: metered and non-metered spaces, commercial parking, alternate side parking, angled parking and seasonally restricted parking.
 - 2. Loading areas, including loading only, truck loading, hotel loading, and no parking zones.
 - 3. Floating Parking Lane- a parking lane that is separated from the curb by a protected bicycle lane that is adjacent to the cur

rking,	P1- Parking Space
	P2- Loading Area
eurb.	D2- Floating Parking Lang

YORK CITY	Eric Adams Mayor Ydanis Rodriguez Commissioner
	W YORK CITY

Roadway Cafe Site Plan Form

Applicant Name:	
Restaurant Name:	
ECED Number	

Drawing Requirements

Food service establishment frontage shown as:

- Line representing the establishment's space facing the sidewalk
- Length
- Label

Street names:

Labels on each street

Sidewalk shown as:

Line representing street curb

Roadway shown as:

Width of curbside lane

Cafe perimeter shown as:

- Lines indicating perimeter
- Length and width

Set-up furniture (tables, chairs, etc.)

Lines or symbols at approximate location within setup

Elements (in Section 2 of this form) within 15 feet of cafe perimeter, shown as:

- Lines or symbols
- Distance from cafe perimeter
- Labels

Utility coverings (water/gas valves, and pull boxes) shown as:

Symbols representing the location within the setup

North arrow

	_ · · · · · · · · · · · · · · · · · · ·	
Use the space below to draw or upload your Site Plan representing your cafe perimeters, furniture, and clear	ances.	
Length of roadway cafe:feet Width of roadway cafe:feet		
, <u> </u>		

SECTION 2: Required Clearances


R22- No crosswalk present

street)

(maintain 20 feet from curb line of intersecting

- Please provide distances from the following objects.
- Only provide a distance if the listed object is within 15 feet of your proposed setup.
- Refer to the <u>Setup Guides</u> in the Dining Out NYC website for more information regarding clearances.

Elements with minimum 15 feet	clearance from r	roadway cafe:		
R01- Subway Stair: Open End	R01- Subway Stair: Open Endfeet R02- Fire Hydrantfeet			
Elements with minimum 10 feet	clearance from r	roadway cafe:		
R03- Subway Elevator Entrance R04- FDNY Curb Cut	feet	R05- MTA Curb Cut	feet	
Elements with minimum 5 feet c	earance from ro	adway cafe:		
R06- Curb Cut R07- Emergency Exit Hatch R08- Subway Stair: Closed End R09- Subway Elevator: Non-Entry R10- Bus Stop Pole: Non- Approaching Side	feetfeetfeetfeet	R11- CitiBike/Bike Share Station R12- Bike Corral R13- Micromobility Station R14- Drainage Infrastructure	feetfeetfeetfeet	
Elements with minimum 3 feet cl	earance from ro	padway cafe:		
R15- Elevated Train Infrastructure	feet	R16- Transformer Vault	feet	
Elements with minimum 1 foor a	nd 6 inches clea	rance from roadway cafe:		
R17- Vent Infrastructure: utility vent poles, vent grates, subway grates	feet	R18- Manholes	inches	
Elements with minimum 6 inches	s clearance from	roadway cafe:		
R19- Thermoplastic Marking	feet			
Roadway cafe distance from cros	sswalks:			
R20- Adjacent to non-approaching side of crosswalk (min. 8 foot distance) R21- Adjacent to approaching (stopping) side of crosswalk (min. 20 foot distance)	feet	crosswalk on fr	istance required om crosswalk on pproaching side	

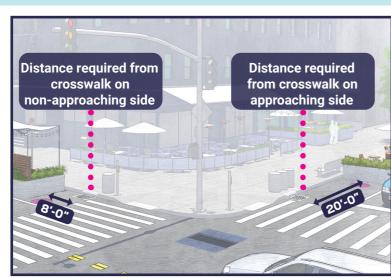

Check this box if none of the objects listed above are within 15 feet of the proposed setup.

feet

SECTION 3: Material Requirements

- Please indicate which of the following materials will be part of your roadway cafe by checking the box next to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements.
- Refer to the <u>Setup Guides</u> in the Dining Out NYC website for more information regarding materials.

1	-	•		\sim 1		_	• -
I	214	SPIS		L.h	200		ict.
ı	au	zı ıa	13	u	ICL		ist:

Materials Checklist:			
Required			
Barriers (All of the following must be met)			
Maintained on all sides of the cafe except the side fronting the ground floor restaurant.			
Not permanently affixed to the roadway.			
30-42 inches tall (excluding planting), and at least 4 inches in width.			
Barriers are interconnected with each other.			
Any cladding over the barriers is securely fastened or affixed.			
Minimum 4 inches wide reflective strip on each barrier on the outward facing side.			
Water-filled with a minimum of 150 pounds per linear foot of barrier length.			
Optional - Only check the material categories you intend to use in your roadway cafe			
Flooring (if using, all of the following must be met)			
Durable, lightweight, easily removable, mold-resistant, elevated from the ground level to allow for			
drainage, and removable to allow for cleaning.			
Flush with the curb line (except if located on a slope, be flush to the greatest extent feasible), and			
compliant with applicable accessibility requirements.			
Maintains a 6 inch covered channel between curb and base of flooring to allow for drainage.			
Furnishings (if using, all of the following must be met)			
Lightweight and easily movable.			
Vertical Screenings (if using, all of the following must be met)			
Located between the barrier and 6 feet above the cafe base or floor.			
Located on the roadway facing side, does not extend the beyond the perimeter of the roadway cafe, and is not affixed to the outward facing side of barriers.			
Easily removable, comprised of non-opaque, fire-grade, and wind resistant materials.			
If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.			
Overhead Coverings/ Umbrellas (if using, all of the following must be met)			
Minimum of 7 feet and maximum of 10 feet from the base or floor of the roadway cafe.			
Has a weighted base and any support structures are not affixed to the outward facing side of barriers, are of sufficient size and strength, made of durable materials, and free of defects.			
Easily removable, comprised of fire-grade and wind resistant materials.			
If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.			
Lighting and Electrical Connections (if using, all of the following must be met)			
Any lighting is outdoor rated, properly secured, and lightweight.			
At least 14 feet above sidewalk, and 18 feet above roadway.			
Not attached to any City property, including street trees.			
Electrical work complies with the applicable requirements set forth in DOT's rules and the New York City Electrical Code. Please note that this may require additional permits from DOB or FDNY, and/or approval from the Landmarks Preservation Commission (LPC) as applicable.			







