



# COMMUNITY BOARD FEEDBACK PACKAGE

Please review this application and provide the required feedback.

# **DINING OUT NYC**

**Business Name: FELICE** 

# **COMMUNITY BOARD RECOMMENDATION FORM**

This form is to be used by community boards during the cafe review process. Any comments from the community board should be recorded on this form and submitted to NYC DOT. For information pertaining to specific cafe design requirements, visit the Dining Out NYC website for program legislation, rules, and Setup Guides.

Cafe Location: 1593 1 AVENUE, NEW YORK, NY, 10028 Application Number: 20240726010005 CB Feedback Deadline (on date or next business day): 02-19-2025 NYCDOT Internal Use Only **Roadway Cafe Setup Comments:** Comments related to the cafe's physical footprint and dimensions: Comments related to **pedestrian flow** (i.e., visbility, safety, potential crowding): Comments related to potential conflicts with existing curb use (i.e., planters, bike racks, bus stops): Overall recommendation for the cafe setup: Suggested modifications related to the above referenced application:

## **RESTAURANT DETAILS**

Food Service Establishment Permit(FSEP)

FSEP#: 41582081

Expiration Date: 04/30/2025 DOHMH Status: CURRENT

Business Legal Name: EIGHTY THIRD AND FIRST LLC.

Assumed Name: FELICE

Business Address: 1593 1 AVENUE, NEW YORK, NY 10028

Venue Type: Restaurant (with bar)

Last updated from DOHMH: 01/21/2025

**Restaurant Information** 

Entity Type: Limited Liability Corporation (LLC)

Phone: (212) 249-4080

Email Address: hello@pb.law

Secondary Email Address: jacopo.giustiniani@sahospitalitygroup.com

DOS Information DOS ID#: 4022953

Process Name: SA HOSPITALITY GROUP LLC

DOS Address: 950 Third Ave, New York, New York 10022

NYS Liquor Authority Information

NYSLA Serial No: 1252924 License Type: On-Premises

Name of License: Eighty Third and First LLC

Title of Representative: Principal

Name of Certificate Holder: Eighty Third and First LLC

User Information

Created By: Max Bookman

Created On: 7/11/2024 10:43:19 AM


Modified By: Max Bookman

Modified On: 7/26/2024 11:25:15 AM

**Business** hours

Sun:12:00 PM- 10:00 PM Mon:12:00 PM- 10:00 PM Tues:12:00 PM- 10:00 PM Wed:12:00 PM- 10:30 AM Thurs:12:00 PM- 10:30 PM Fri:12:00 PM- 10:30 PM

Sat:12:00 PM- 10:30 PM

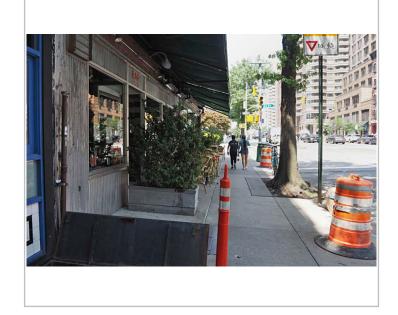




















# **SECTION 1: Site Plan**

- This Site Plan form is required to be uploaded in the "Roadway Site Plan" field of your online application.
- Refer to the How to Apply page in the Dining Out NYC website for more information about the application process.

# **Identify Permitted Parking Location:**

- Identify the Parking Sign in front of or around the area where your roadway setup would be located.
- Roadway cafes can only be placed in:
  - 1. Parking spaces, which include: metered and non-metered spaces, commercial parking, alternate side parking, angled parking, and seasonally restricted parking.
- 2. Loading areas, including loading only, truck loading, hotel loading, and no parking zones.
- 3. Floating Parking Lane- a parking lane that is separated from the curb by a protected bicycle lane that is adjacent to the curb.

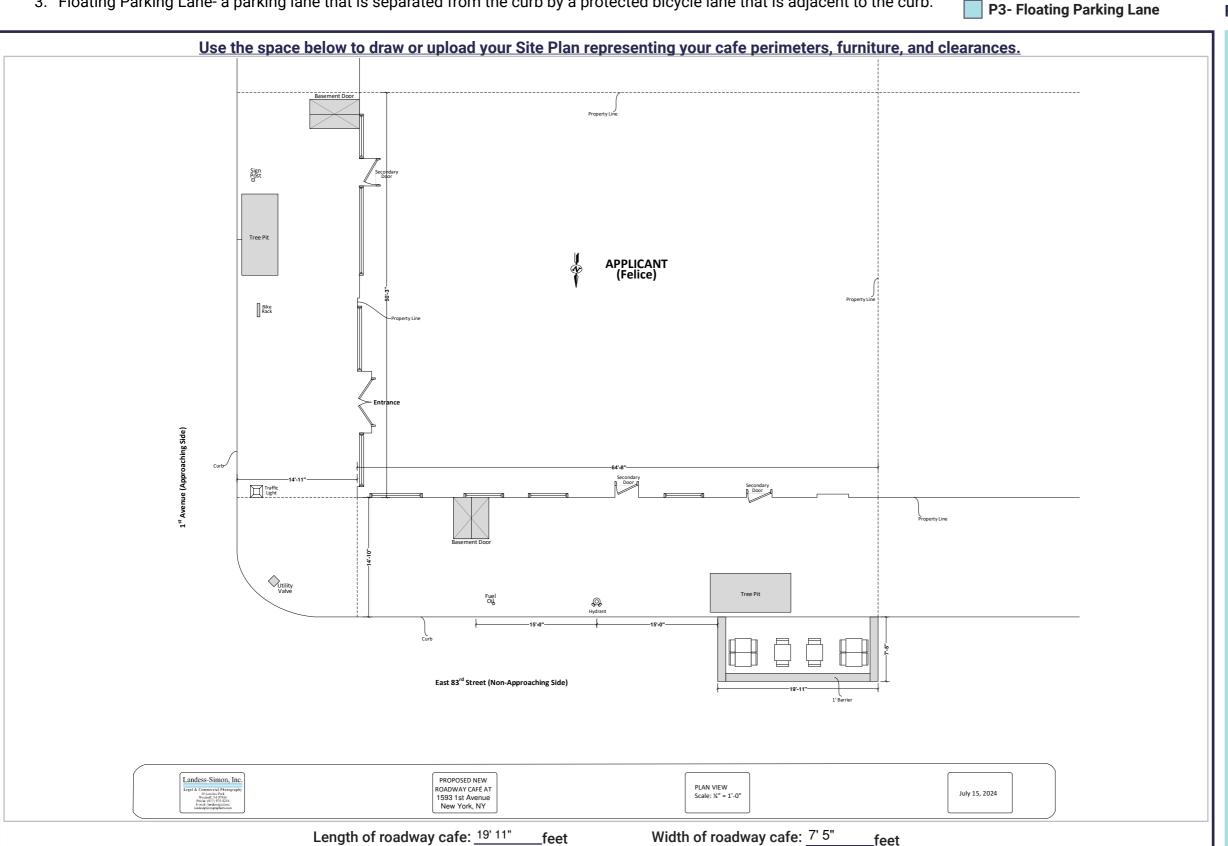





# **Roadway Cafe Site Plan Form**

**Applicant Name:** 

Eighty Third and First LLC

**Restaurant Name:** 

P1- Parking Space

P2- Loading Area

**Felice** 

**FSEP Number:** 

41582081

#### **Drawing Requirements**

# Food service establishment frontage shown by:

- Line representing space occupied in building
- Labels
- Length

#### Street names:

Labels on each street

#### Sidewalk shown as:

- Line representing street curb
- Width measured from building line to curb line

#### Roadway shown as:

- Lines indicating parking lane
- Width of parking lane

#### Cafe perimeter shown as:

- Lines indicating perimeter
- Length and width of all three sides

### Set-up furniture (tables, chairs, etc.) shown as:

 Lines or symbols at approximate location within setup

#### Elements or objects shown as:

- Lines or symbols
- Labels
- Distance from cafe perimeter

#### **Utility coverings shown as:**

Symbols representing the approximate shape of the covering within the setup

□ UTILITY COVERING

# SECTION 2: Required Clearances

- · Please provide distances from the following objects.
- Only provide a distance if the listed object is within 15 feet of your proposed setup.
- Leave box blank if not applicable.

R20- Adjacent to

approaching (stopping) side of crosswalk (min. 20 foot distance)

(maintain 20 feet from curb line of intersecting

R21- No crosswalk present

street)

• Refer to the <u>Setup Guides</u> in the Dining Out NYC website for more information regarding clearances.

| Elements with minimum 15 feet cl   | earance from ro      | adway cafe:   |  |
|--|----------------------|---|--|
| R01- Subway Stair: Open End R02- Fire Hydrant  | feet<br>feet         |   |  |
| Elements with minimum 10 feet cl   | earance from ro      | adway cafe:   |  |
| R03- Subway Elevator Entrance _ R04- FDNY Curb Cut _ R05- MTA Curb Cut _   | feet<br>feet<br>feet |   |  |
| Elements with minimum 5 feet clea  | arance from roa      | dway cafe:  |  |
| R06- Curb Cut  R07- Emergency Exit Hatch  R08- Subway Stair: Closed End  R09- Subway Elevator: Non-Entry  R10- Bus Stop Pole:  Non- Approaching Side  Elements with minimum 3 feet clean | feet                 | R11- CitiBike/Bike Share Stare R12- Bike Corral R13- Micromobility Station R14- Drainage Infrastructure | feet   |
| R15- Elevated Train Infrastructure   |                      |   |  |
| R16- Transformer Vault   | feet                 |   |  |
| Elements with minimum 1 foor and   | d 6 inches clear     | ance from roadway cafe:   |  |
| R17- Vent Infrastructure   | feet                 |   |  |
| Elements with minimum 6 inches   | clearance from       | roadway cafe:   |  |
| R18- Thermoplastic Marking   | feet                 |   |  |
| Roadway cafe distance from cross   | walks:               |   |  |
| R19- Adjacent to<br>non-approaching side of<br>crosswalk<br>(min. 8 foot distance)   | 30 feet              | Distance required from crosswalk on non-approaching side  | Distance required from crosswalk on approaching side |

feet

feet

# **SECTION 3: Material Requirements**

City Electrical Code.

- Please indicate which of the following materials will be part of your roadway cafe by checking the box next to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements.

| <ul> <li>Refer to the <u>Setup Guides</u> in the Dining Out NYC website for more information regarding materials.</li> </ul>  |   |  |  |
|---|---|--|--|
| Materials Checklist:  |   |  |  |
| Not permand 30-42 inches Barriers are Any cladding Minimum 4 i Water-filled If your propo   | *Required* on all sides of the cafe except the side fronting the ground floor restaurant. ently affixed to the roadway. stall (excluding planting), and at least 4 inches in width. interconnected with each other. gover the barriers is securely fastened or affixed. Inches wide reflective strip on each barrier on the outward facing side. With a minimum of 150 pounds per linear foot of barrier length. Dised barriers will utilize fill materials other than water please check this box. This may require formation from the applicant and further review by the Dining Out NYC team, as well as DOT units and City agencies.  |  |  |
| Flooring  Durable, light drainage, an Flush with the compliant was Maintains a Maintains a Lightweight  Vertical Screenin Located between the service on the service Easily removes | tweight, easily removable, mold-resistant, elevated from the ground level to allow for d removable to allow for cleaning.  The curb line (except if located on a slope, be flush to the greatest extent feasible), and ith applicable accessibility requirements.  The covered channel between curb and base of flooring to allow for drainage.  The covered channel between curb and base of flooring to allow for drainage.  The covered channel between curb and base of flooring to allow for drainage.  The covered channel between curb and base of flooring to allow for drainage.  The covered channel between curb and base of flooring to allow for drainage.  The covered channel between curb and base of flooring to allow for drainage.  The covered channel between curb and base of flooring to allow for drainage. |  |  |
| Overhead Covering  Minimum of  Has a weigh of sufficient  Easily remove  If within 50  Lighting and Elect  Any lighting  At least 14 f  |   |  |  |

Please check this box if you are submitting additional documents for review. Documents may include technical drawings prepared by a licensed professional.

Electrical work complies with the applicable requirements set forth in the DOT's rules and the New York