



COMMUNITY BOARD FEEDBACK PACKAGE

Please review this application and provide the required feedback.

DINING OUT NYC

COMMUNITY BOARD RECOMMENDATION FORM

This form is to be used by community boards during the cafe review process. Any comments from the community board should be recorded on this form and submitted to NYC DOT. For information pertaining to specific cafe design requirements, visit the Dining Out NYC website for program legislation, rules, and Setup Guides.

Business Name: DORRIAN'S RED HAND RESTAURANT

Cafe Location: 1616 2 AVENUE, NEW YORK, NY, 10028 Application Number: 20240729010050 CB Feedback Deadline (on date or next business day): 3/12/2025 NYCDOT Internal Use Only **Roadway Cafe Setup Comments:** Comments related to the cafe's physical footprint and dimensions: Comments related to **pedestrian flow** (i.e., visbility, safety, potential crowding): Comments related to potential conflicts with existing curb use (i.e., planters, bike racks, bus stops): Overall recommendation for the cafe setup: Suggested modifications related to the above referenced application:

RESTAURANT DETAILS- DORRIAN'S RED HAND RESTAURANT

(20240729010050)

Food Service Establishment Permit(FSEP)

FSEP#: 40365239

Expiration Date: 06/30/2025 DOHMH Status: CURRENT

Business Legal Name: 1616 SECOND AVE. RESTAURANT, INC.

Assumed Name: DORRIAN'S RED HAND RESTAURANT Business Address: 1616 2 AVENUE, NEW YORK, NY 10028

Venue Type: Restaurant (with bar) Last updated from DOHMH: 01/16/2025

Restaurant Information

Entity Type: Corporation Phone: (212) 772-6660

Email Address: kellymlk136@GMAIL.COM

DOS Information

DOS ID#: 149245

Process Name: THE CORPORATION

DOS Address: 1616 2ND AVE, NEW YORK, New York 10028

NYS Liquor Authority Information

NYSLA Serial No: 034023129990

License Type: On-Premises

Name of License: JAMES DORRIAN Title of Representative: PRESIDENT

Name of Certificate Holder: 1616 SECOND AVE RESTAURANT INC

User Information

Created By: Michael Kelly

Created On: 7/29/2024 11:40:34 PM

Modified By: Michael Kelly

Modified On: 7/29/2024 11:40:34 PM

Business hours

Sun:

10:30 AM- 4:00 AM

Mon:

10:30 AM- 4:00 AM

Tues:

10:30 AM- 4:00 AM

Wed:

10:30 AM- 4:00 AM

Thurs:

10:30 AM- 4:00 AM

Fri:


10:30 AM- 4:00 AM

Sat:

10:30 AM- 4:00 AM





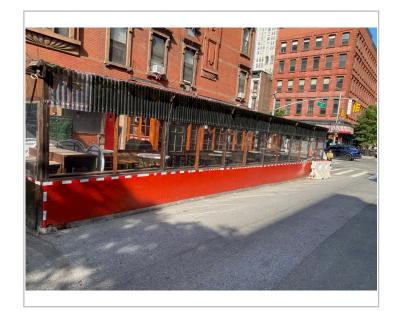





SECTION 1: Site Plan

- · This Site Plan form is required to be uploaded in the "Roadway Site Plan" field of your online application.
- Refer to the Flow to Apply page in the Dining Out NYC website for more information about the application process.

Identify Permitted Parking Location:

- Identify the Parking Sign in front of or around the area where your roadway setup would be located.
- Roadway cafes can only be placed in:
 - 1. Parking spaces, which include metered and non-metered spaces, commercial parking, alternate side parking, angled parking, and seasonally restricted parking.
 - 2. Loading areas, including loading only, truck loading, hotel loading, and no parking zones.
 - 3. Floating Parking Lane- a parking lane that is separated from the curb by a protected bicycle lane that is adjacent to the curb.



Roadway Cafe Site Plan Form

Applicant Name:

Restaurant Name:

FSEP Number

P1-Parking Space

P2-Loading Area

40365239

Drawing Requirements

Food service establishment frombge shown as:

- · Line representing the establishment's space facing the sidewark.
- Length
- Label

Street names:

· Labels on each street

Sidewalk shown as:

Line representing street curb

Roadway shown as:

· Width of curbside lane

Cafe perimeter shown as:

- · Lines indicating perimeter
- Length and width

Set-up furniture (tables, chairs, etc.) shown as:

 Lines or symbols at approximate location within setup


Elements (in Section 2 of this form) within 15 feet of cafe perimeter, shown

- Lines or symbols
- Distance from cafe perimeter
- Labels

Utility coverings (water/gas valves, and pull boxes) shown as:

 Symbols representing the location within the setup

North arrow

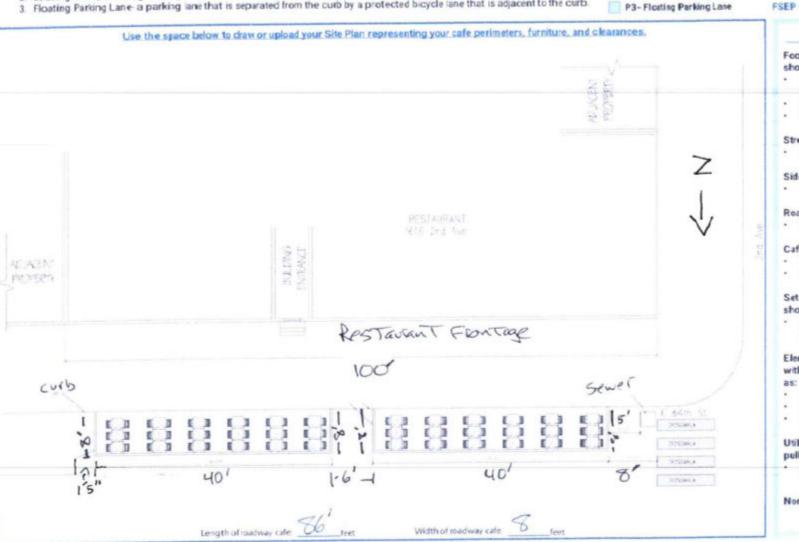

SECTION 2: Required Clearances Please provide distances from the following objects: Only provide a distance if the fisted object is within 15 feet of your proposed setup. Refer to the <u>Setup Guides</u> in the Dining Out NYC website for more information regarding clearances. Elements with minimum 15 feet clearance from roadway cafe: feet R02- Fire Hydrant R01- Subway Stair: Open End Elements with minimum 10 feet clearance from roadway cafe; ROS- MTA Curb Cut feet RO3 - Subway Eevator Entrance RO4- FDNY Curo Cut Elements with minimum 5 feet clearance from roadway cafe: 911- CitiBike/Bike Share Station feet RO6- Curb Cut feet R12-Bike Corral RC7- Emergency Exit Hatch feet feet feet R13 - Micromobility Station RCB Subway Sair Closed End R14- Drainage Infrastructure feet 809- Subway Eevator Non-Entry feet R10-Bus Stop Pole Non-Approaching Side Elements with minimum 3 feet clearance from roadway cafe; feet R16-Transformer Vault R15- Elevated Train Infrastructure Elements with minimum 1 foor and 6 inches clearance from roadway cafe: inches R18-Manholes R17 Ventinfrastructure: utility vert poles, vent grates, subway grates Elements with minimum 6 inches clearance from readway cafe: R19-Thermoplastic Marking Roadway cafe distance from crosswalks: R20 Adjacent to non-approaching side of Distance required crosswalk istance required from min. 8 foot distances gresswalk on R21- Adjacent to approaching (stopping)

Check this box if none of the objects listed above are within 15 feet of the proposed setup

feet

side of crosswalk

R22- No crosswalk present

itmeet!

(min. 20 loot distance)

maintair 20 feet from

curb line of intersecting

SECTION 3: Material Requirements

- Please indicate which of the following materials will be part of your roadway cafe by checking the to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements.
- Refer to the Setup Guides in the Dining Out NYC website for more information regarding materials.

Materials Checklist:

Required

Barriers (All of the following must be met)

- Maintained on all sides of the cate except the side fronting the ground floor restaurant.
- Not permanently affixed to the roadway.
- 30-42 inches tall (excluding planting), and at least 4 inches inwidth.
- Barriers are interconnected with each other.
- Any cladding over the barriers is securely fastened or affixed.
- Minimum 4 inches wide reflective strip on each barrier on the outward facing side.
- Water-filled with a minimum of 150 pounds per linear foot of barrier length.

Optional - Only check the material categories you intend to use in your roadway cafe.

Flooring (if using, all of the following must be met)

- Durable, lightweight, easily removable, mold-resistant, elevated from the ground level to allow for drainage, and removable to allow for cleaning.
- Flush with the curb line (except if located on a slope, be flush to the greatest extent feasible), and compliant with applicable accessibility equirements.
- Maintains a 6 inch covered channel between curb and base of flooring to allow for drainage.

Furnishings (if using, all of the following must be met)

Lightweight and easily movable.

Vertical Screenings (if using, all of the following must be met)

- Located between the barrier and 6 feet above the rafe base or floor.
- Located on the roadway facing side, does not extend the beyond the perimeter of the roadway cafe, and is not affixed to the outward facing side of barriers.
- Easily removable, comprised of non-opaque, fire-grade, and wind resistant materials.
- If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.

Overhead Coverings/ Umbrellas (if using, all of the following must be met)

- Minimum of 7 feet and maximum of 10 feet from the base or floor of the roadway cafe.
- Has a weighted base and any support structures are not affixed to the outward lacing side of barriers, are of sufficient size and strength, made of durable materials, and free of defects.
- Easily removable, comprised of fire-grade and wind resistant materials.
- If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.

Lighting and Electrical Connections (if using, all of the following must be met)

- Any lighting is outdoor rated, properly secured, and lightweight.
- At least 14 feet above sidewalk, and 18 feet above roadway.
- Not attached to any City property, including street trees.
- Electrical work compiles with the applicable requirements set forth in DOT sinutes and the New York City.
 Electrical Code. Please note that this may require additional permits from DOB or FDNY, and/or approval from the Landmarks Preservation Commission (LPC) as applicable.