



Eric Adams Mayor Ydanis Rodriguez Commissioner

COMMUNITY BOARD FEEDBACK PACKAGE

Please review this application and provide the required feedback.

DINING OUT NYC

COMMUNITY BOARD RECOMMENDATION FORM

This form is to be used by community boards during the cafe review process. Any comments from the community board should be recorded on this form and submitted to NYC DOT. For information pertaining to specific cafe design requirements, visit the Dining Out NYC website for program legislation, rules, and Setup Guides.

Business Name: BY THE GLASS 2 LLC

Cafe Location: 1484 2ND AVE, NEW YORK, NY, 10075

Application Number: 20241112010001

CB Feedback Deadline (on date or next business day): 3/12/2025

NYCDOT Internal Use Only

Roadway Cafe Setup Comments:

Comments related to the cafe's physical footprint and dimensions:

Comments related to pedestrian flow (i.e., visbility, safety , potential crowding):

Comments related to potential conflicts with existing curb use (i.e., planters, bike racks, bus stops):

Overall recommendation for the cafe setup:

Suggested modifications related to the above referenced application:

RESTAURANT DETAILS

Food Service Establishment Permit(FSEP) FSEP#: 50142175 Expiration Date: 09/15/2023 DOHMH Status: PENDING APPLICATION Business Legal Name: BY THE GLASS 2 LLC Assumed Name: UVA NEXT DOOR Business Address: 1484 2ND AVE, NEW YORK, NY 10075 Venue Type: Restaurant (with bar) Last updated from DOHMH: 02/04/2025

Restaurant Information

Entity Type: Limited Liability Corporation (LLC) Phone: (917) 472-7921 Email Address: info@intunehospitality.com

DOS Information

DOS ID#: 5719851 Process Name: BY THE GLASS 2 LLC DOS Address: 1484 2nd Ave, New York, New York 10075

NYS Liquor Authority Information

NYSLA Serial No: 034022111578 License Type: On-Premises Name of License: BY THE GLASS 2 LLC Title of Representative: Managing Member Name of Certificate Holder: BY THE GLASS 2 LLC

Business hours

Sun: 5:00 PM- 11:30 PM Mon: 5:00 PM- 11:30 PM Tues: 5:00 PM- 11:30 PM Wed: 5:00 PM- 11:30 PM Thurs: 5:00 PM- 11:30 PM Fri: 5:00 PM- 11:30 PM Sat: 5:00 PM- 11:30 PM











SECTION 1: Site Plan

- This Site Plan form is required to be uploaded in the "Roadway Site Plan" field of your online application.
- Refer to the <u>How to Apply</u> page in the Dining Out NYC website for more information about the application process.


Identify Permitted Parking Location:

- Identify the Parking Sign in front of or around the area where your roadway setup would be located.
- Roadway cafes can only be placed in:
 - 1. Parking spaces, which include: metered and non-metered spaces, commercial parking, alternate side parking, angled parking, and seasonally restricted parking.
 - 2. Loading areas, including loading only, truck loading, hotel loading, and no parking zones.
 - 3. Floating Parking Lane- a parking lane that is separated from the curb by a protected bicycle lane that is adjacent to the curb.



- P2- Loading Area
- P3- Floating Parking Lane

Use the space below to draw or upload your Site Plan representing your cafe perimeters, furniture, and clearances.

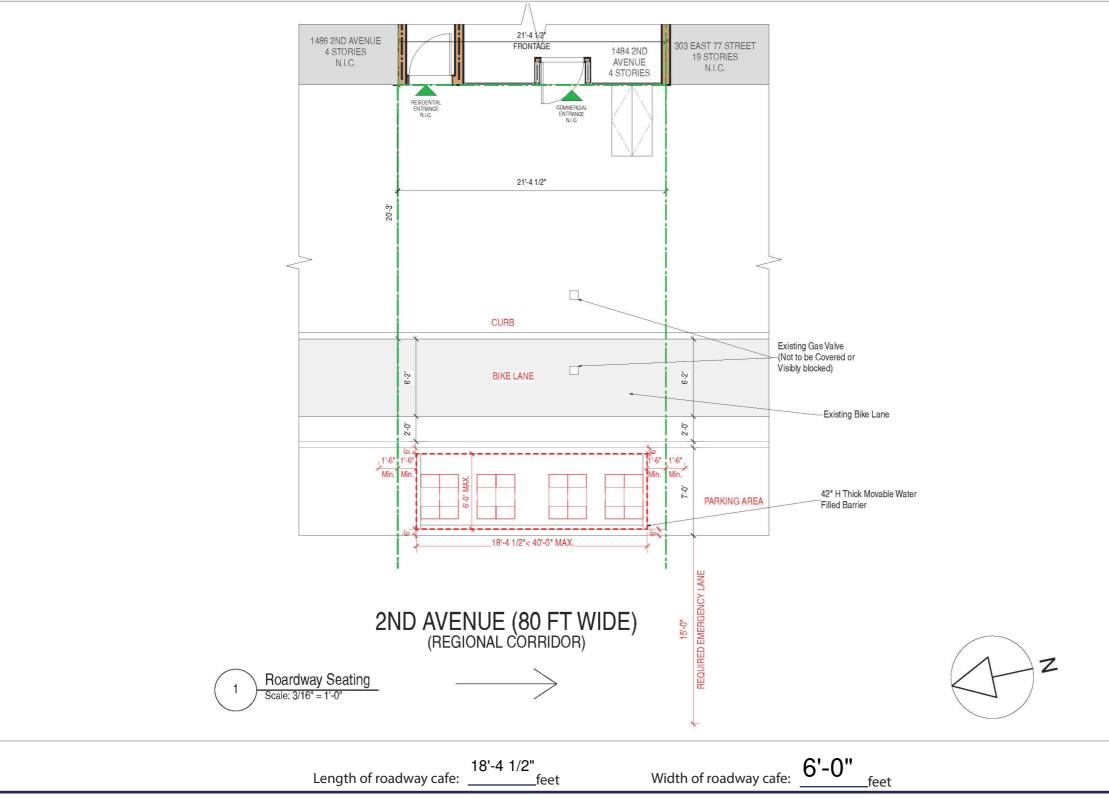





Ydanis Rodriguez

Roadway Cafe Site Plan Form Hari Kaylan

Applicant Name:

Restaurant Name:

FSEP Number:

Uva Next Door

50142175

Drawing Requirements

Food service establishment frontage shown as:

- Line representing the establishment's space facing the sidewalk
- Length
- Label

Street names:

Labels on each street

Sidewalk shown as:

Line representing street curb

Roadway shown as:

• Width of curbside lane

Cafe perimeter shown as:

- Lines indicating perimeter
- Length and width

Set-up furniture (tables, chairs, etc.) shown as:

• Lines or symbols at approximate location within setup

Elements (in Section 2 of this form) within 15 feet of cafe perimeter, shown as:

- Lines or symbols
- Distance from cafe perimeter
- Labels

Utility coverings (water/gas valves, and pull boxes) shown as:

Symbols representing the location within the setup

North arrow

SECTION 2: Required Clearances

- Please provide distances from the following objects.
- Only provide a distance if the listed object is within 15 feet of your proposed setup.
- Refer to the <u>Setup Guides</u> in the Dining Out NYC website for more information regarding clearances.

Elements with minimum 15 feet c	learance from ro	badway cafe:	
R01- Subway Stair: Open End	feet	R02- Fire Hydrant	feet
Elements with minimum 10 feet clearance from roadway cafe:			
R03- Subway Elevator Entrance R04- FDNY Curb Cut	feet	R05- MTA Curb Cut	feet
Elements with minimum 5 feet clearance from roadway cafe:			
 R06- Curb Cut R07- Emergency Exit Hatch R08- Subway Stair: Closed End R09- Subway Elevator: Non-Entry R10- Bus Stop Pole: Non- Approaching Side Elements with minimum 3 feet cle R15- Elevated Train Infrastructure 	feet	R16- Transformer Vault	feet feet feet feet
Elements with minimum 1 foor an	d 6 Inches clear	ance from roadway cafe:	
R17- Vent Infrastructure: utility vent poles, vent grates, subway grates	feet	R18- Manholes	inches
Elements with minimum 6 inches	clearance from	roadway cafe:	
R19- Thermoplastic Marking	feet		
Roadway cafe distance from crosswalks:			
 R20- Adjacent to non-approaching side of crosswalk (min. 8 foot distance) R21- Adjacent to approaching (stopping) side of crosswalk (min. 20 foot distance) R22- No crosswalk present (maintain 20 feet from curb line of intersecting street) 	feet feet 43.17'feet	crosswalk on f	Distance required rom crosswalk on approaching side

SECTION 3: Material Requirements

- Please indicate which of the following materials will be part of your roadway cafe by checking the box next to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements.
- Refer to the <u>Setup Guides</u> in the Dining Out NYC website for more information regarding materials.

Materials Checklist:

*Required
Barriers (All of the following must be met)
Maintained on all sides of the cafe except the side front
Not permanently affixed to the roadway.
30-42 inches tall (excluding planting), and at least 4 incl
Barriers are interconnected with each other.
Any cladding over the barriers is securely fastened or af
Minimum 4 inches wide reflective strip on each barrier
Water-filled with a minimum of 150 pounds per linear for
*Optional - Only check the material categories yo
Flooring (if using, all of the following must be met)
Durable, lightweight, easily removable, mold-resistant, drainage, and removable to allow for cleaning.
Flush with the curb line (except if located on a slope, be compliant with applicable accessibility requirements.
Maintains a 6 inch covered channel between curb and l
Furnishings (if using, all of the following must be me
Lightweight and easily movable.
Vertical Screenings (if using, all of the following mus
Located between the barrier and 6 feet above the cafe
Located on the roadway facing side, does not extend th is not affixed to the outward facing side of barriers.
Easily removable, comprised of non-opaque, fire-grade If within 50 feet of any regulatory or warning signs, doe
Overhead Coverings/ Umbrellas (if using, all of the fo
Minimum of 7 feet and maximum of 10 feet from the ba
Has a weighted base and any support structures are no of sufficient size and strength, made of durable materia
Easily removable, comprised of fire-grade and wind resing If within 50 feet of any regulatory or warning signs, doe
Lighting and Electrical Connections (if using, all of th
Any lighting is outdoor rated, properly secured, and lighting is outdoor rated.
At least 14 feet above sidewalk, and 18 feet above road
Not attached to any City property, including street trees
Electrical work complies with the applicable requireme
Electrical Code. Please note that this may require additi Landmarks Preservation Commission (LPC) as applicabl

Check this box if none of the objects listed above are within 15 feet of the proposed setup.

ing the ground floor restaurant.

hes in width.

fixed. on the outward facing side.

oot of barrier length.

ou intend to use in your roadway cafe*

elevated from the ground level to allow for

e flush to the greatest extent feasible), and

base of flooring to allow for drainage.

<u>t)</u>

<u>st be met)</u>

base or floor. ne beyond the perimeter of the roadway cafe, and

, and wind resistant materials. es not exceed 46 inches in height.

<u>ollowing must be met)</u>

ase or floor of the roadway cafe. t affixed to the outward facing side of barriers, are als, and free of defects. sistant materials. es not exceed 46 inches in height.

<u>e following must be met)</u>

htweight.

lway.

es.

ents set forth in DOT's rules and the New York City ional permits from DOB or FDNY, and/or approval from the le.