



Eric Adams Mayor Ydanis Rodriguez Commissioner

COMMUNITY BOARD FEEDBACK PACKAGE

Please review this application and provide the required feedback.

DINING OUT NYC

COMMUNITY BOARD RECOMMENDATION FORM

This form is to be used by community boards during the cafe review process. Any comments from the community board should be recorded on this form and submitted to NYC DOT. For information pertaining to specific cafe design requirements, visit the Dining Out NYC website for program legislation, rules, and Setup Guides.

Business Name: BOTTE UES

Cafe Location: 1606 1ST AVE, NEW YORK, NY, 10028

Application Number: 20240730010007

CB Feedback Deadline (on date or next business day): 4/30/2025

NYCDOT Internal Use Only

Roadway Cafe Setup Comments:

Comments related to the cafe's physical footprint and dimensions:

Comments related to **pedestrian flow** (i.e., visbility, safety , potential crowding):

Comments related to potential conflicts with existing curb use (i.e., planters, bike racks, bus stops):

Overall recommendation for the cafe setup:

Suggested modifications related to the above referenced application:

RESTAURANT DETAILS

Food Service Establishment Permit(FSEP)

FSEP#: 50110695 Expiration Date: 04/30/2022 DOHMH Status: CURRENT Business Legal Name: BOTTE CUCINA LLC Assumed Name: BOTTE UES Business Address: 1606 1ST AVE, NEW YORK, NY 10028 Venue Type: Restaurant (with bar) Last updated from DOHMH: 01/16/2025

Restaurant Information

Entity Type: Limited Liability Corporation (LLC) Phone: (212) 207-0052 Email Address: kellymlk136@GMAIL.COM

DOS Information

DOS ID#: 5971597 Process Name: FRANCESCO LAURONI DOS Address: 25-07 BROADWAY, QUEENS, New York 11106

NYS Liquor Authority Information

NYSLA Serial No: 034023139250 License Type: On-Premises Name of License: FRANCESCO LAURONI Title of Representative: LLC MEMBER Name of Certificate Holder: BOTTE CUCINA LLC


User Information


Created By: Michael Kelly Created On: 7/30/2024 10:24:56 AM Modified By: Michael Kelly Modified On: 7/30/2024 10:24:56 AM


Business hours Sun: 12:00 PM- 10:00 PM Mon: 4:00 PM- 10:00 PM Tues: 4:00 PM- 10:00 PM Wed: 4:00 PM- 10:00 PM Thurs: 4:00 PM- 10:00 PM Fri: 12:00 PM- 11:00 PM Sat: 12:00 PM- 11:00 PM






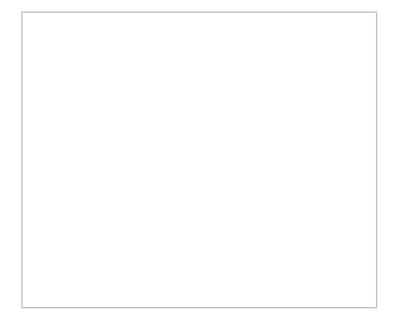

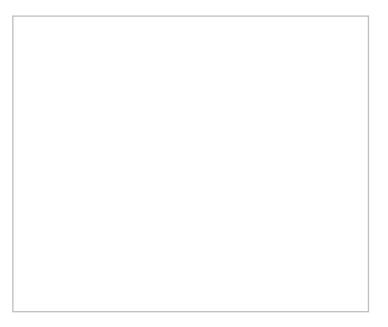

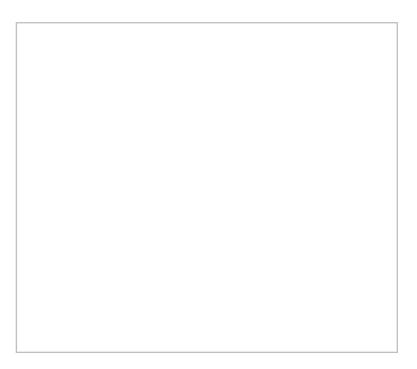

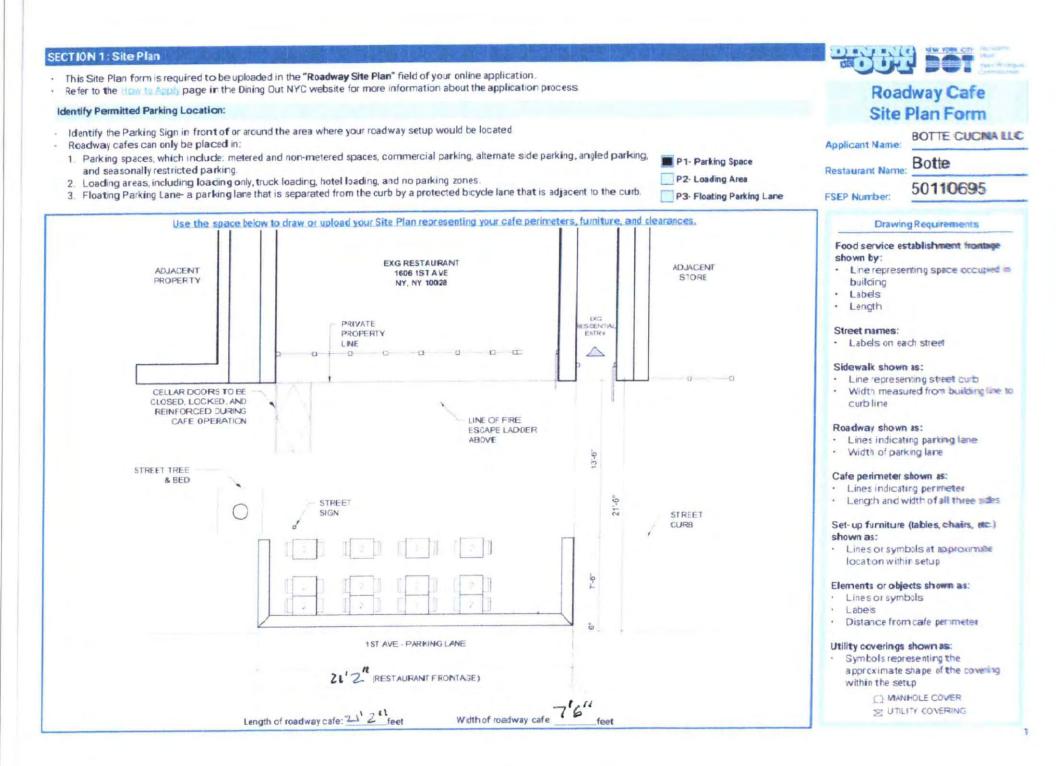

SECTION 2: Required Clearances

- · Please provide distances from the following objects.
- Only provide a distance if the listed object is within 15 feet of your proposed setup.
- Leave box blank if not applicable.
- Refer to the Setup Guides in the Dining Out NYC website for more information regarding clearances

Elements with minimum 15 feet clearance from roadway cafe:

R01 - Subway Stair Open End	feet
R02- Fire Hydrant	feet
Elements with minimum 10 feet	clearance from roadway cafe:

R03- Subway Elevator Entrance ______feet
R04- FDNY Curb Cut ______feet
R05- MTA Curb Cut feet

Elements with minimum 5 feet clearance from roadway cafe:

R06- Curb Cut	feet	R1 1- CitiBike/Bike Share Station	feet
R07- Emergency Exit Hatch	feet	R1 2- Bike Corral	feet
R08- Subway Stair: Closed End	feet	R1 3- Micromobility Station	feet
R09- Subway Elevator: Non-Entry	feet	R1 4- Drainage Infrastructure	feet
R10- Bus Stop Pole: Non- Approaching Side	feet		
Elements with minimum 3 feet cleara	nce from roa	dway cafe:	
R15- Elevated Train Infrastructure	feet		
R16- Transformer Vault	feet		
Elements with minimum 1 foor and 6	inches clean	ance from roadway cafe:	

feet


feet

R17- Vent Infrastructure

Elements with minimum 6 inches clearance from roadway cafe:

R18- Thermoplastic Marking

Roadway cafe distance from crosswalks:

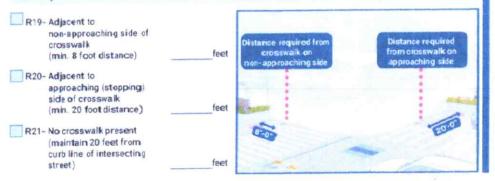

SECTION 3: Material Requirements

Please indicate which of the following materials will be part of your roadway cafe by checking the bas meet to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements.
 Refer to the Setup Guides in the Dining Out NYC website for more information regarding materials.

'Required'

Materials Checklist:

Barriers

- Maintained on all sides of the cafe except the side fronting the ground floor restaurant.
- Not permanently affixed to the roadway.
- 30-42 inches tall (excluding planting), and at least 4 in ches in width.
- Barriers are interconnected with each other.
- Any cladding over the barriers is securely fastered or affixed.
- Minimum 4 inches wide reflective strip on each barrier on the outward facing side.
- Water-filled with a minimum of 150 pounds per linear foot of barrier length.
- If your proposed barriers will utilize fill materials other than water please check this box. This may require additional information from the applicant and further review by the Dining Out NYC team, as wellas supporting DOT units and City agencies.

"Optional- Only check the material categories you intend to use in your roadway cate"

E Flooring

- Durable, lightweight, easily removable, mold-resistant, elevated from the ground level to allow for drainage, and removable to allow for cleaning.
- Flush with the curb line (except if locared on a slope, be flush to the greatest extent feasible), and compliant with applicable accessibility requirements.
- Maintains a 6 inch covered channel between curb and base of flooring to allow for drainage.

Furnishings

Lightweight and easily movable.

Vertical Screenings

- Located between the barrier and 6 feet above the cafe base or floor.
- Located on the roadway facing side, design of extend the beyond the perimeter of the roadway calls, and is not affixed to the outward facing side of barriers.
- Easily removable, comprised of non-opaque, fire-grade, and wind resistant materials.
- If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.

Overhead Coverings/ Umbrellas

- Minimum of 7 feet and maximum of 1 I feet from the base or floor of the roadway cafe.
- Has a weighted base and any support structures are not affixed to the outward facing side of barriers, are of sufficient size and strength, made of durable materials, and free of defects.
- Easily removable, comprised of fire-grade and wind resistant materials.
- If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.

Lighting and Electrical Connections

- Any lighting is outdoor rated, properly secured, and lightweight.
- At least 14 feet above sidewalk, and 18 feet above roadway.
- Not attached to any City property, including street trees.
- Electrical work complies with the applicable requirements set forth in the DOT's rules and the New York City Electrical Code.

2

Please check this box if you are submitting additional documents for review. Documents may include technical drawings prepared by a licensed professional