



COMMUNITY BOARD FEEDBACK PACKAGE

Please review this application and provide the required feedback.

DINING OUT NYC

COMMUNITY BOARD RECOMMENDATION FORM

This form is to be used by community boards during the cafe review process. Any comments from the community board should be recorded on this form and submitted to NYC DOT. For information pertaining to specific cafe design requirements, visit the Dining Out NYC website for program legislation, rules, and Setup Guides.

Business Name: L'OSTERIA Cafe Location: 1219 LEXINGTON AVENUE, NEW YORK, NY, 10028 Application Number: 20241003010001 CB Feedback Deadline (on date or next business day): 07/02/2025 NYCDOT Internal Use Only **Roadway Cafe Setup Comments:** Comments related to the cafe's physical footprint and dimensions: Comments related to **pedestrian flow** (i.e., visbility, safety, potential crowding): Comments related to potential conflicts with existing curb use (i.e., planters, bike racks, bus stops): Overall recommendation for the cafe setup: Suggested modifications related to the above referenced application:

RESTAURANT DETAILS

Food Service Establishment Permit(FSEP)

FSEP#: 50066030

Expiration Date: 06/30/2025 DOHMH Status: CURRENT

Business Legal Name: MHH 1590 LLC

Assumed Name: L'OSTERIA

Business Address: 1219 LEXINGTON AVENUE, NEW YORK,

NY 10028

Venue Type: Restaurant (with bar) Last updated from DOHMH: 04/09/2025

Restaurant Information

Entity Type: Limited Liability Corporation (LLC)

Phone: (646) 524-6294

Email Address: losterianyc@gmail.com

DOS Information

DOS ID#: 4967704

Process Name: MHH1590,LLC

DOS Address: 1219 LEXINGTON AV, NEW YORK, New York

10028

NYS Liquor Authority Information

NYSLA Serial No: 808190 License Type: On-Premises Name of License: MHH1590LLC Title of Representative: OWNER

Name of Certificate Holder: MARIA C MARQUEZ HASS

User Information

Created By: Maria Marquez-Hass Created On: 8/2/2024 1:32:50 PM Modified By: Brandon Valente Modified On: 4/2/2025 3:55:45 PM

Business hours

Sun:

12:00 PM- 10:00 PM

Mon:

12:00 PM- 10:00 PM

Tues:

12:00 PM- 10:00 PM

Wed:

12:00 PM- 10:00 PM

Thurs:

12:00 PM- 10:00 PM

Fri:

12:00 PM- 10:00 PM


Sat:

12:00 PM- 10:00 PM







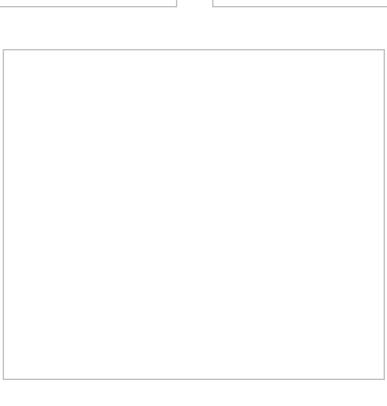

SECTION 1: Site Plan

- This Site Plan form is required to be uploaded in the "Roadway Site Plan" field of your online application.
- Refer to the How to Apply page in the Dining Out NYC website for more information about the application process.


Identify Permitted Parking Location:

- Identify the Parking Sign in front of or around the area where your roadway setup would be located.
- Roadway cafes can only be placed in:
 - 1. Parking spaces, which include: metered and non-metered spaces, commercial parking, alternate side parking, angled parking, and seasonally restricted parking.
 - 2. Loading areas, including loading only, truck loading, hotel loading, and no parking zones.
 - 3. Floating Parking Lane- a parking lane that is separated from the curb by a protected bicycle lane that is adjacent to the curb.





Roadway Cafe Site Plan Form



Drawing Requirements

Food service establishment frontage shown as:

- Line representing the establishment's space facing the sidewalk
- Length
- Label

Street names:

Labels on each street

Sidewalk shown as:

Line representing street curb

Roadway shown as:

· Width of curbside lane

Cafe perimeter shown as:

- Lines indicating perimeter
- Length and width

Set-up furniture (tables, chairs, etc.) shown as:

 Lines or symbols at approximate location within setup


Elements (in Section 2 of this form) within 15 feet of cafe perimeter, shown as:

- Lines or symbols
- Distance from cafe perimeter
- Labels

Utility coverings (water/gas valves, and pull boxes) shown as:

Symbols representing the location within the setup

North arrow

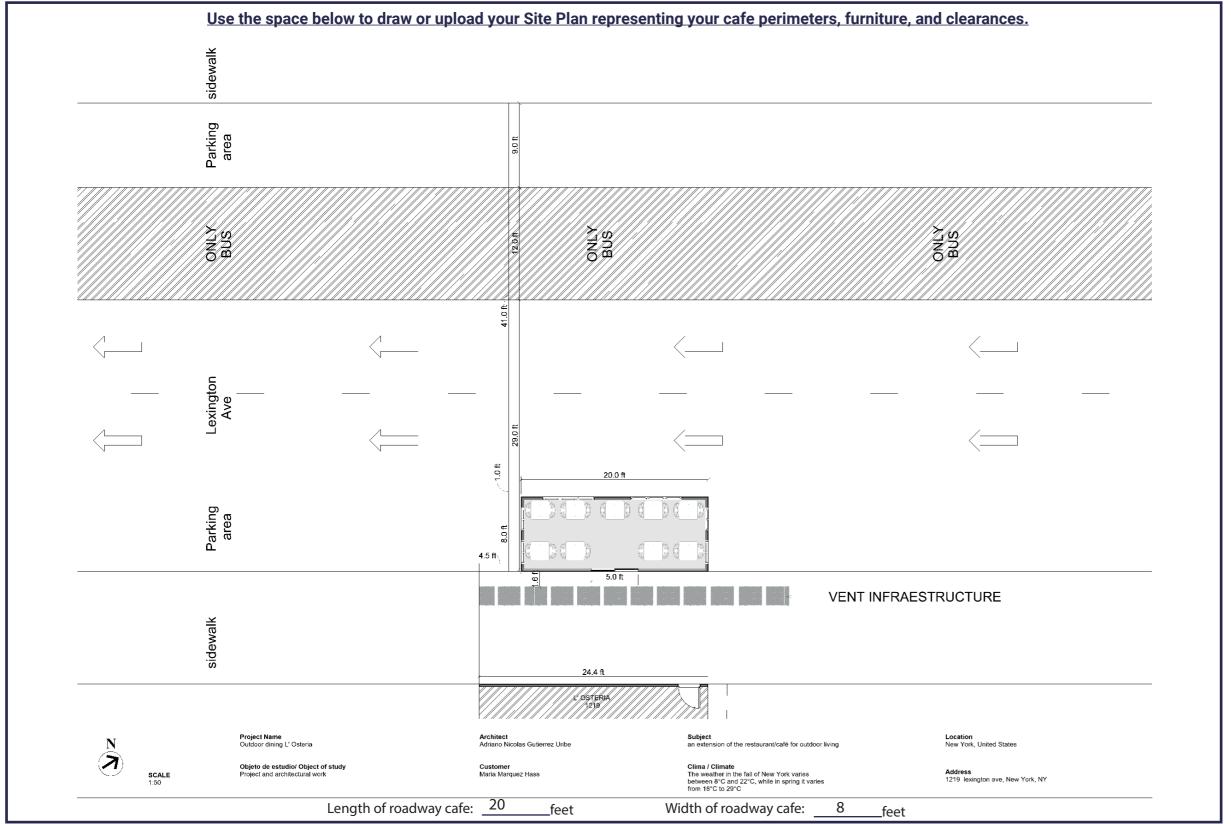

10N 2: Required Clear.	ances		
ease provide distances from ily provide a distance if the ifer to the Setup Guides in t	listed object is v	bjects. vithin 15 feet of your proposed setup. //C website for more information regarding	ng clearances.
ents with minimum 15 feet			
1- Subway Stair: Open End	feet	R02- Fire Hydrant	feet
ents with minimum 10 feet	clearance from	roadway cafe:	
3- Subway Elevator Entrance 4- FDNY Curb Cut	feet	R05- MTA Curb Cut	feet
ents with minimum 5 feet o	learance from r	oadway cafe:	
utility vent poles, vent grates, subway grates ents with minimum 6 inches	nd 6 inches clear inches clear	R16= Transformer Vault arance from roadway cafe: R18= Manholes	feetfeetfeetfeetfeet
9- Thermoplastic Marking	7 of feet		
way cafe distance from cros	SWEIKS		
0- Adjacent to non-approaching side of crosswalk (min. 8 foot distance)	30 feet	consewalk on from t	ice required rosswalk on aching side
i= Adjacent to approaching (stopping) side of crosswalk (min, 20 foot distance)	30 feet		
2- No crosswalk present (maintain 20 feet from curb line of intersecting street)	30 feet		

SECTION 3: Material Requirements

- Please indicate which of the following materials will be part of your roadway cafe by checking the box next to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements.
- Refer to the Setup Guides in the Dining Out NYC website for more information regarding materials.

Materials Checklist:

Required Barriers (All of the following must be met) Maintained on all sides of the cafe except the side fronting the ground floor restaurant. Not permanently affixed to the roadway. 20-42 inches tall (excluding planting), and at least 4 inches in width. Barriers are interconnected with each other. Any cladding over the barriers is securely fastened or affixed. Minimum 4 inches wide reflective strip on each barrier on the outward facing side. Water-filled with a minimum of 150 pounds per linear foot of barrier length.

Optional - Only check the material categories you intend to use in your roadway cafe

Flooring (if using, all of the following must be met)

- W Durable, lightweight, easily removable, mold-resistant, elevated from the ground level to allow for drainage, and removable to allow for cleaning.
- Flush with the curb line (except if located on a slope, be flush to the greatest extent feasible), and compliant with applicable accessibility requirements.
- Maintains a 6 inch covered channel between curb and base of flooring to allow for drainage.

Furnishings (if using, all of the following must be met)

Lightweight and easily movable.

Vertical Screenings (if using, all of the following must be met)

- Located between the barrier and 6 feet above the cafe base or floor.
- Located on the roadway facing side, does not extend the beyond the perimeter of the roadway cafe, and is not affixed to the outward facing side of barriers.
- Easily removable, comprised of non-opaque, fire-grade, and wind resistant materials.
- If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.

Overhead Coverings/ Umbrellas (if using, all of the following must be met)

- Minimum of 7 feet and maximum of 10 feet from the base or floor of the roadway cafe.
- Has a weighted base and any support structures are not affixed to the outward facing side of barriers, are of sufficient size and strength, made of durable materials, and free of defects.
- Easily removable, comprised of fire-grade and wind resistant materials.
- If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.

Lighting and Electrical Connections (if using, all of the following must be met)

- Any lighting is outdoor rated, properly secured, and lightweight.
- At least 14 feet above sidewalk, and 18 feet above roadway.
- Not attached to any City property, including street trees.
- Electrical work complies with the applicable requirements set forth in DOT's rules and the New York City Electrical Code. Please note that this may require additional permits from DOB or FDNY, and/or approval from the Landmarks Preservation Commission (LPC) as applicable.